



1st Gen

Magic Hollow Wall Anchor



- Lamps
- Pictures
- Light shelves
- Coat racks
- Mirrors
- Photo frames
- Curtain rods
- Other medium weight items

CODE: 416HL

Applicable thickness of plasterboard:

★ 12-16mm



Precisely calculated and validated design ensures superior grip without harming drywall surfaces.

Self-drilling capability, advanced installation easily mastered with minimal training.



Patented screws ensure optimal expansion for non-damaging drywall performance.

RECOMMENDED INSTALLATION

No need extra tool, if you can turn screw.

ADVANCED INSTALLATION

with **MINIMAL** training *

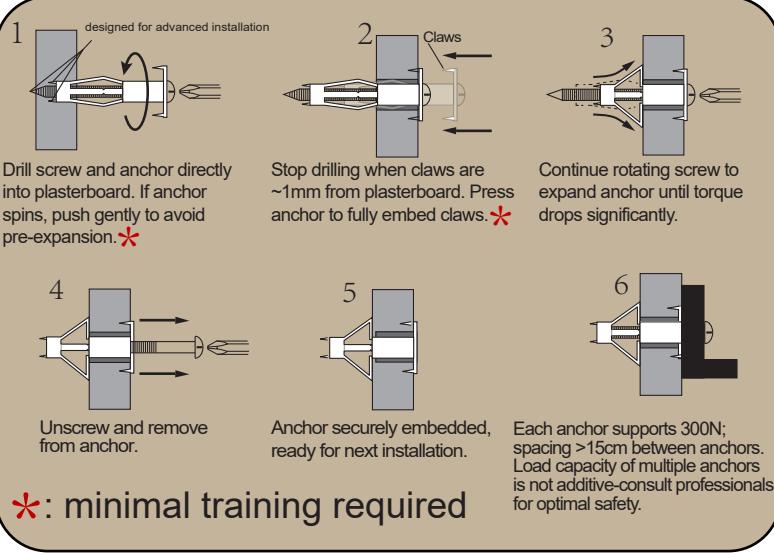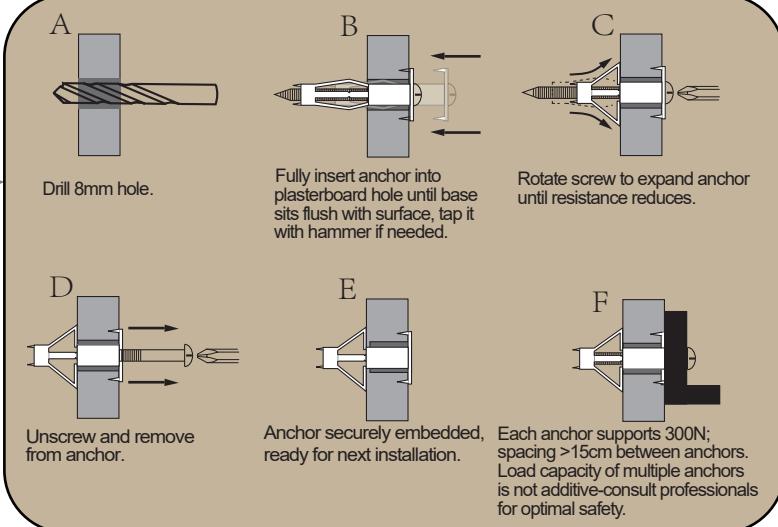

*: minimal training required

For more information, Pls Email:

Chen Xiaojun: jmtmco@outlook.com
Ms. Paney: hongly1@anchor.com.cn
Ms. Grace: sales.d@fastening.com.cn



Common HWA



Magic HWA

VS



Suitable for any plasterboard, including but not limited to drywall with rock wool, XPS-bonded plasterboard, plastic panels, fiber cement board, plywood, etc.

JMTM Specializes in Design

All products precision-crafted by

 Suzhou Litto Fastener Co., Ltd.